

ARTISAN CLASSIC

LVT FLOORING (2.0MM)

Natural Texture

| Waterproof

| Ultra Stabilize

Why choose LVT Flooring?

Looking for a floor suitable for renovation? LVT flooring is the solution for you. Laying LVT flooring on an existing floor is very fast. This type of flooring can be laid over an existing floor, even on an uneven surface. This way you won't waste time removing old flooring.

ARTISAN CLASSIC

When you live a full life, a floor that can withstand everything is essential. Combine robust practical features with surreal surface details and you'll have beautiful, high-quality flooring without worry. Does it get any better than that?

You will find that our three unique features will make you fall in love with LVT flooring, which is the best choice for your flooring.

1. NATURAL AUTHENTIC TEXTURE

Our floors have a very natural surface design that recreates a natural feel in your house. From walking in the forest to picking flowers in the forest, nature gives us the respite we need from our busy lives and gives us inspiration when we create our own decorations.



perfektflooring™



2. REDUCE NOISE AND BE VERY QUIET

After a busy day, you deserve to go home and enjoy some peace and quiet. The children are running around the kitchen getting ready, and you can usually hear some noise. Our LVT flooring provides incredible noise comfort

Our floors provide ideal conditions for relaxation, what do you think?



3. GOOD WATERPROOF PERFORMANCE

In a house full of life, accidents happen but our floors can handle the liquid that pours down. The water cannot be filtered between the beams, so there is no retention under the floor. Our technology prevents dirt and damage to the bottom due to unhealthy environments.





Color and Paving



Colour
120001



Colour
120002



Colour
120003



Colour
120004



Colour
120005



Colour
120006



Colour
120007



Colour
120008



Colour
120009



Colour
120010



Colour
120011



Colour
120012


ARTISAN CLASSIC LVT Flooring Peculiarity

(A) Super matte finish

In the home, everyone should be free to be themselves, take the children to play and run, the fun of family gatherings, and the pets who live their own lives. Our high performance surface finish creates a beautiful opacity effect. In addition, our floors have excellent stain resistance and wear resistance.

(B) Natural design


The natural knots, wood grain and stone surfaces on the LVT floor are so real that you have to look at them closely to see the difference. LVT bottom optimizes for more stability, as well as our well-designed and high quality design.

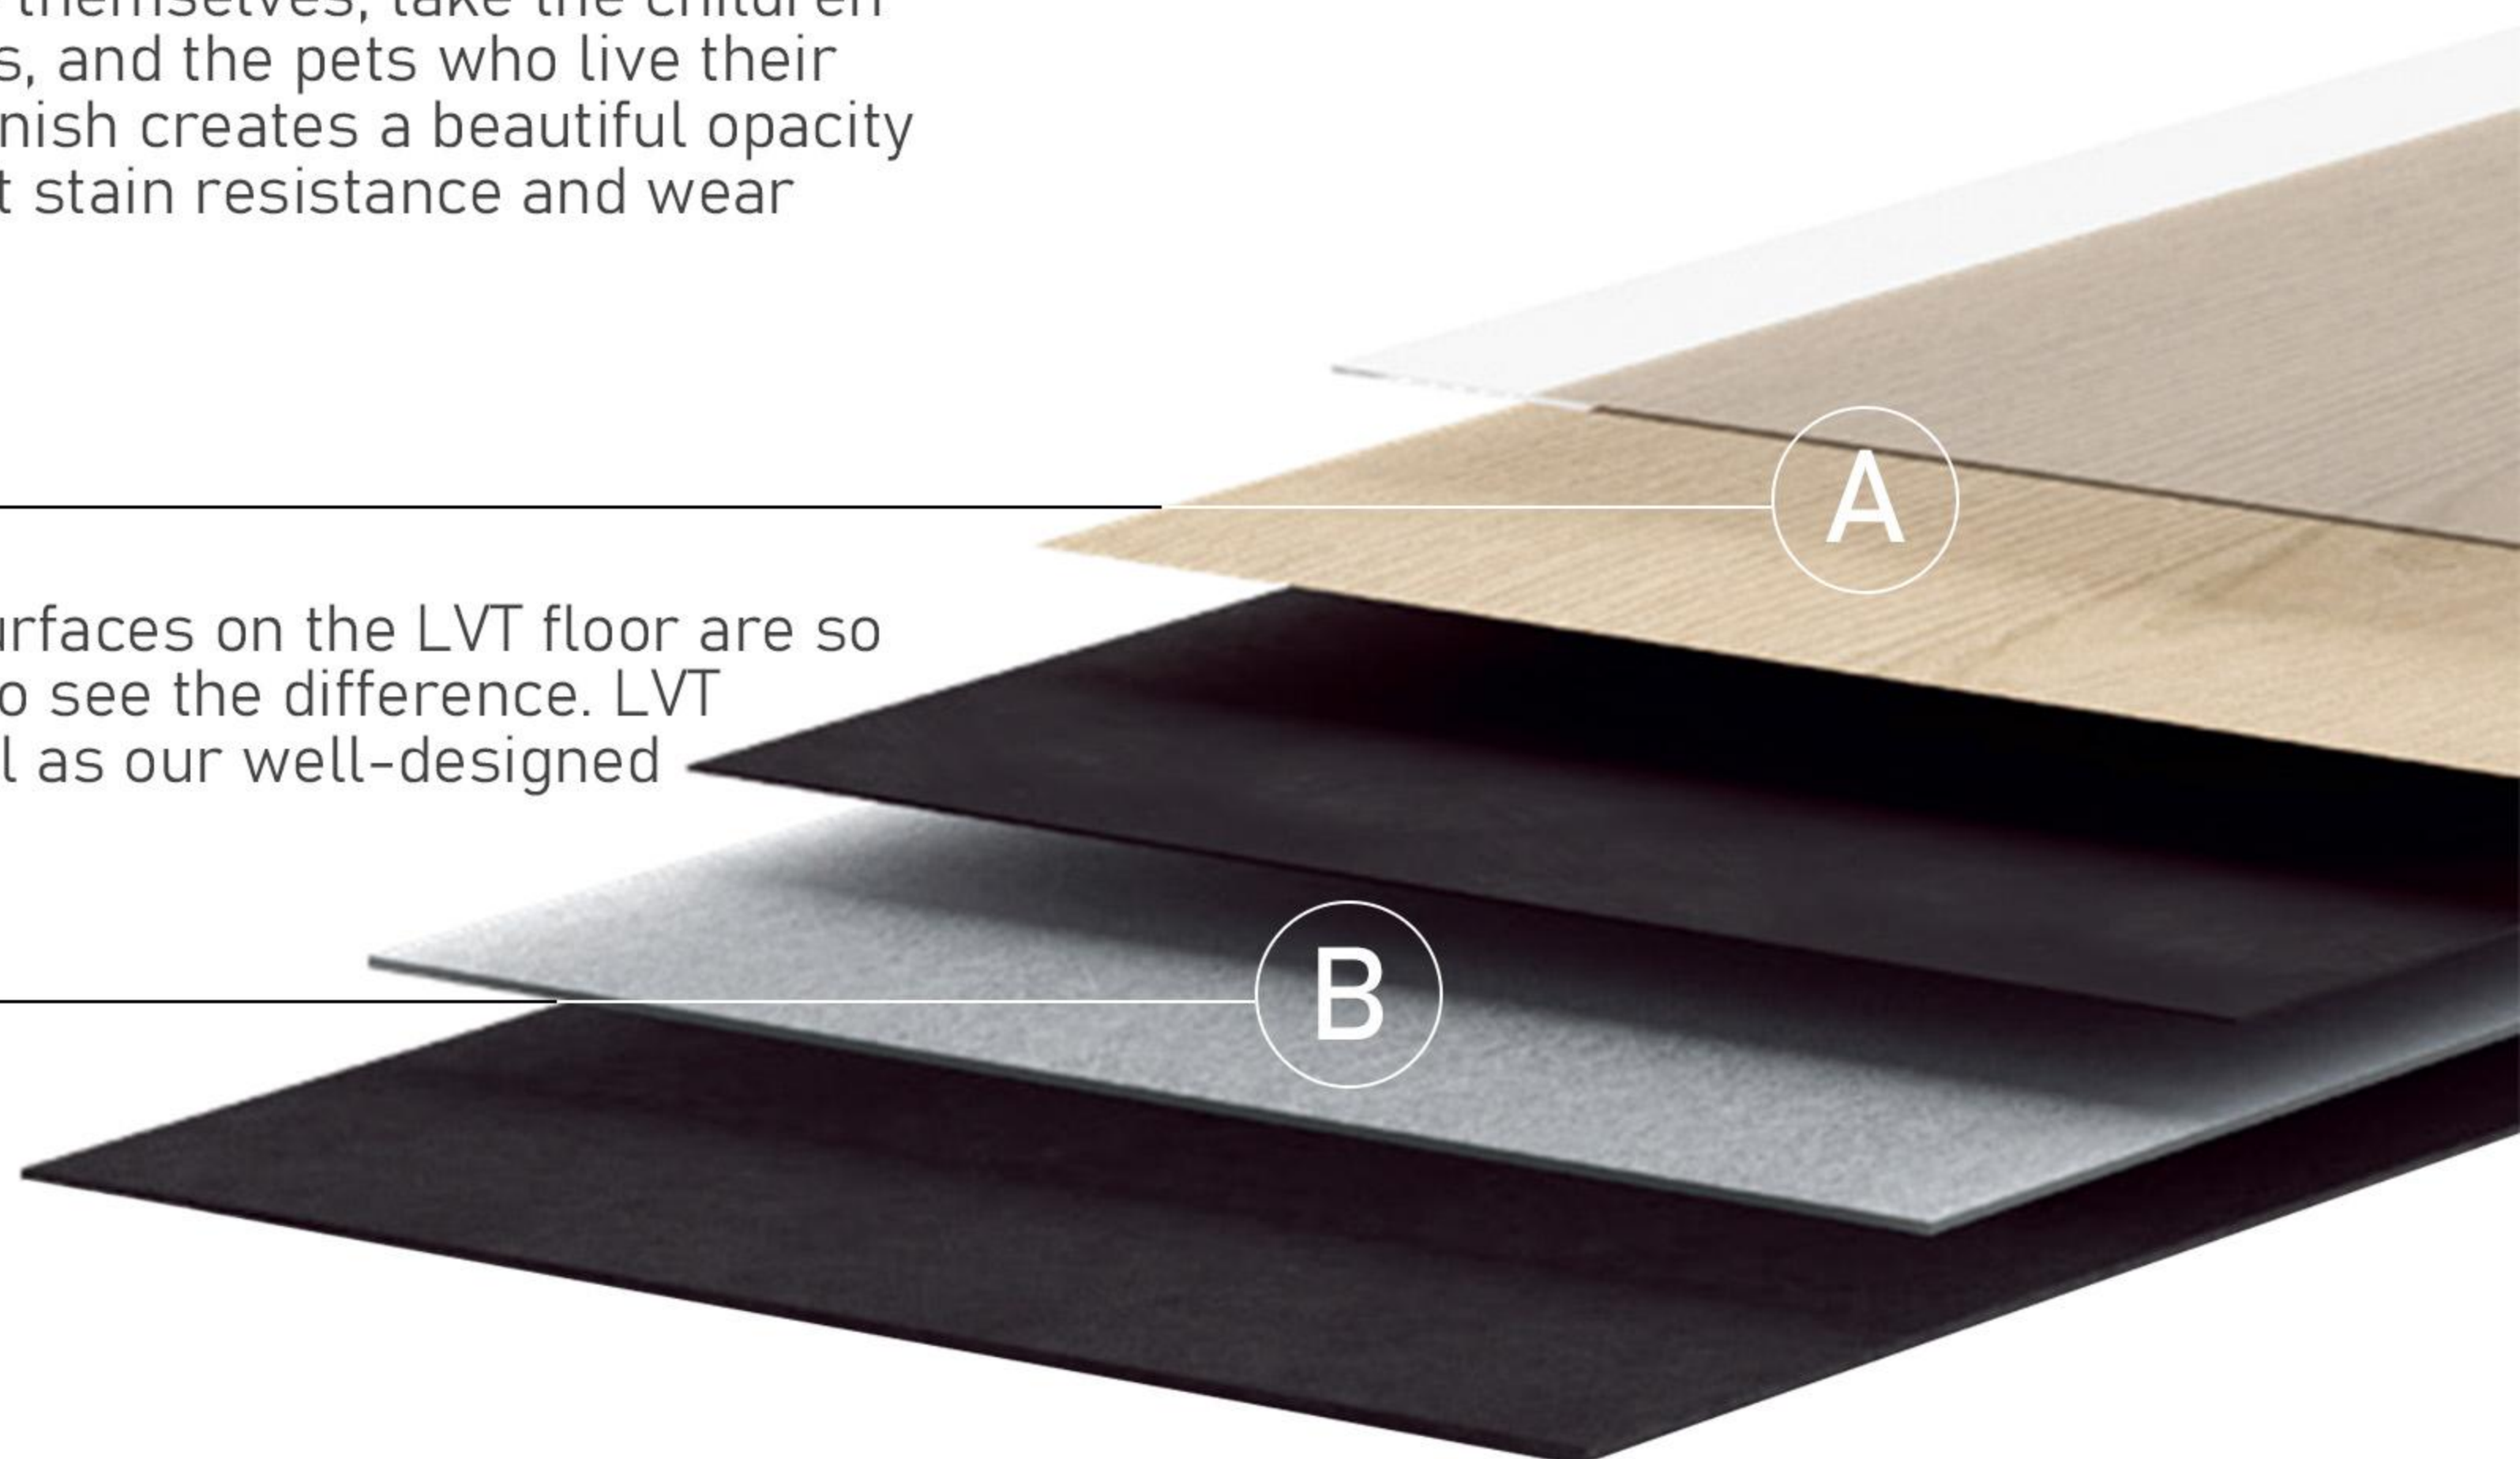



Colour Code 120001

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm

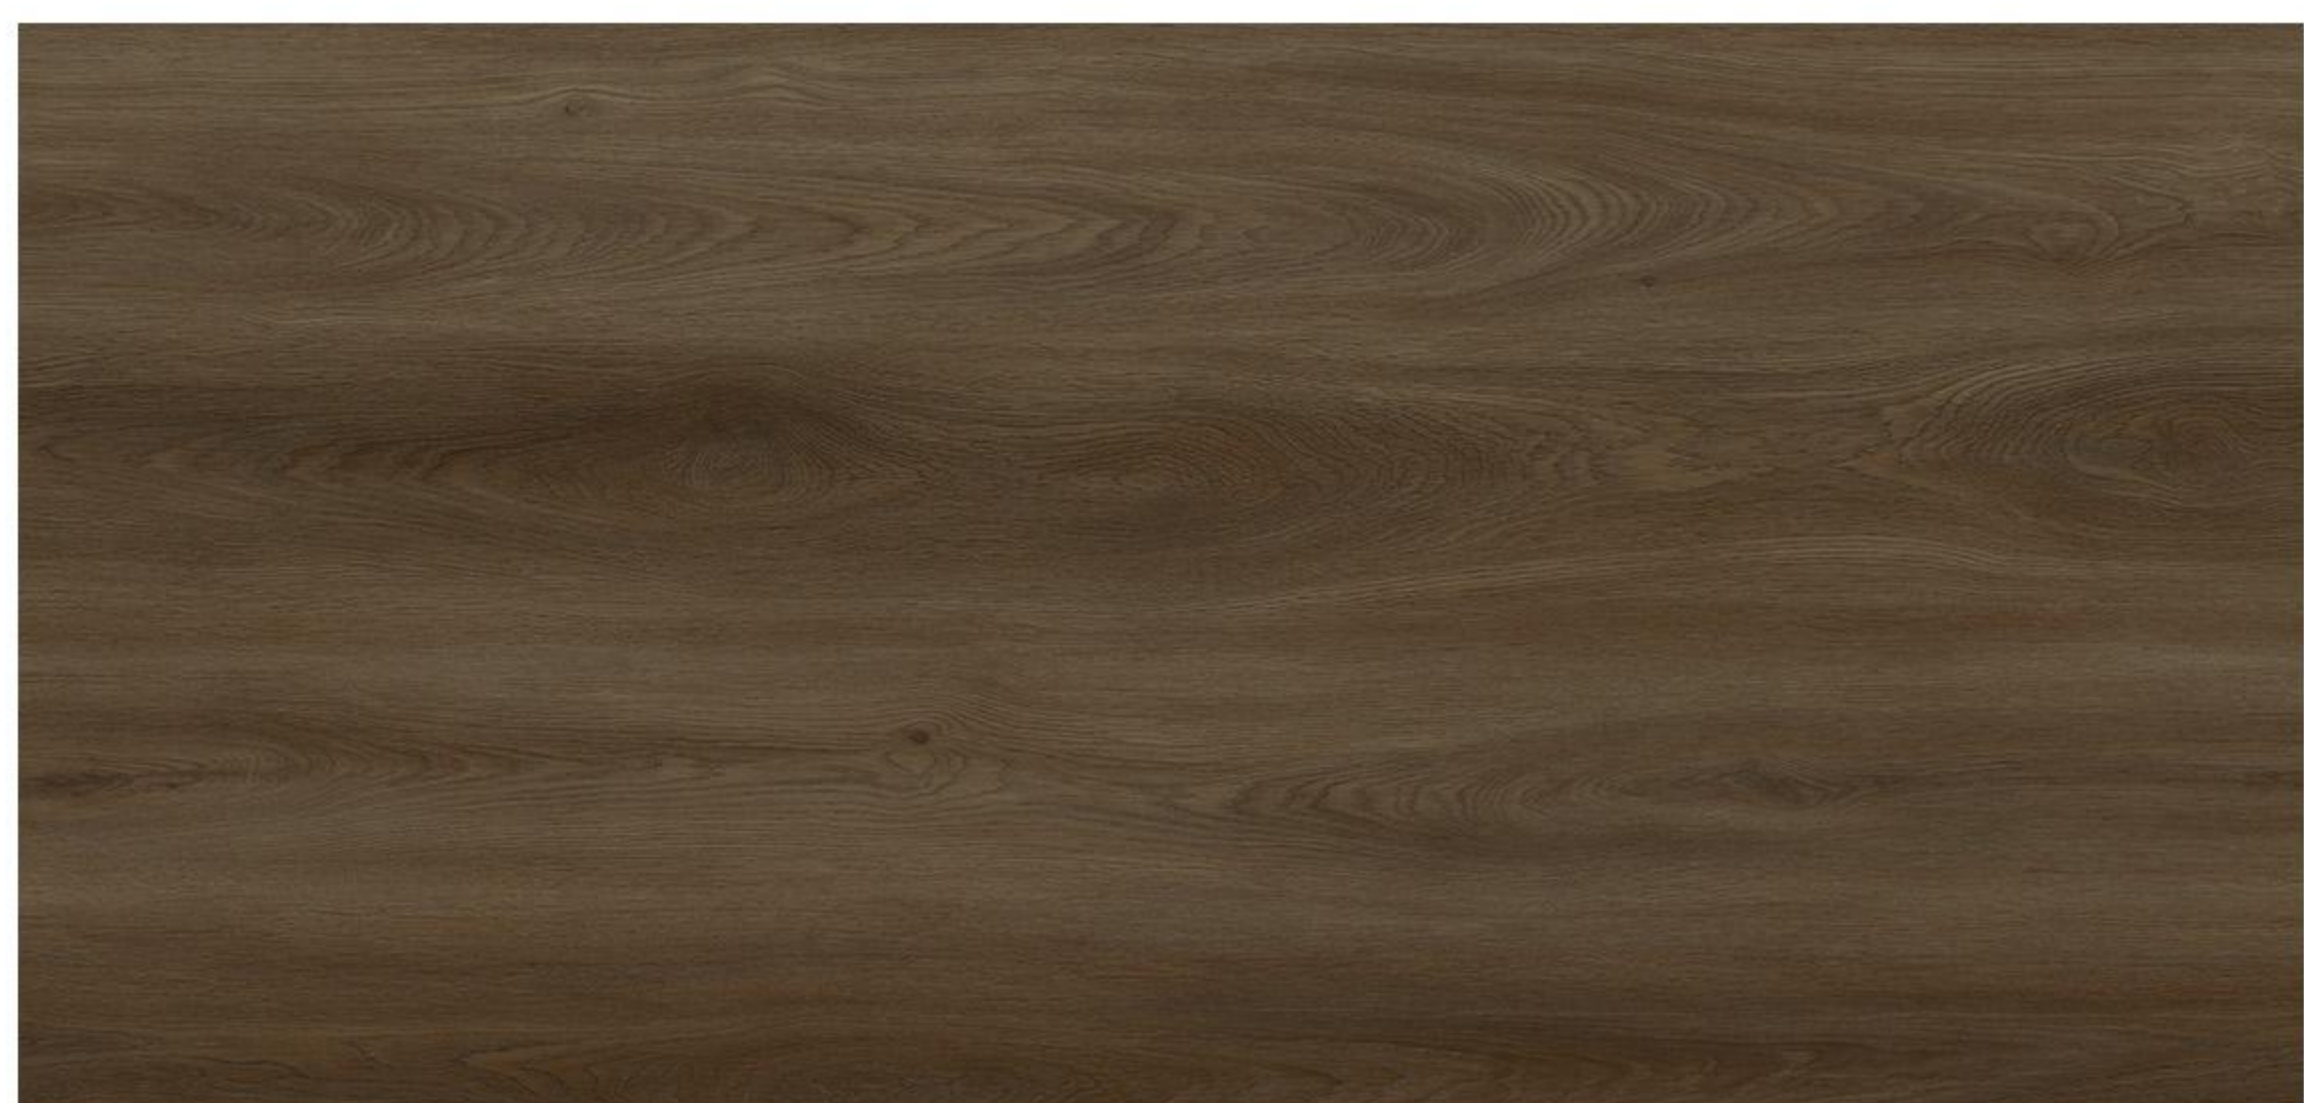

Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120002

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120003

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Classic | 2.0mm LVT



Colour Code 120004

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof




Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT

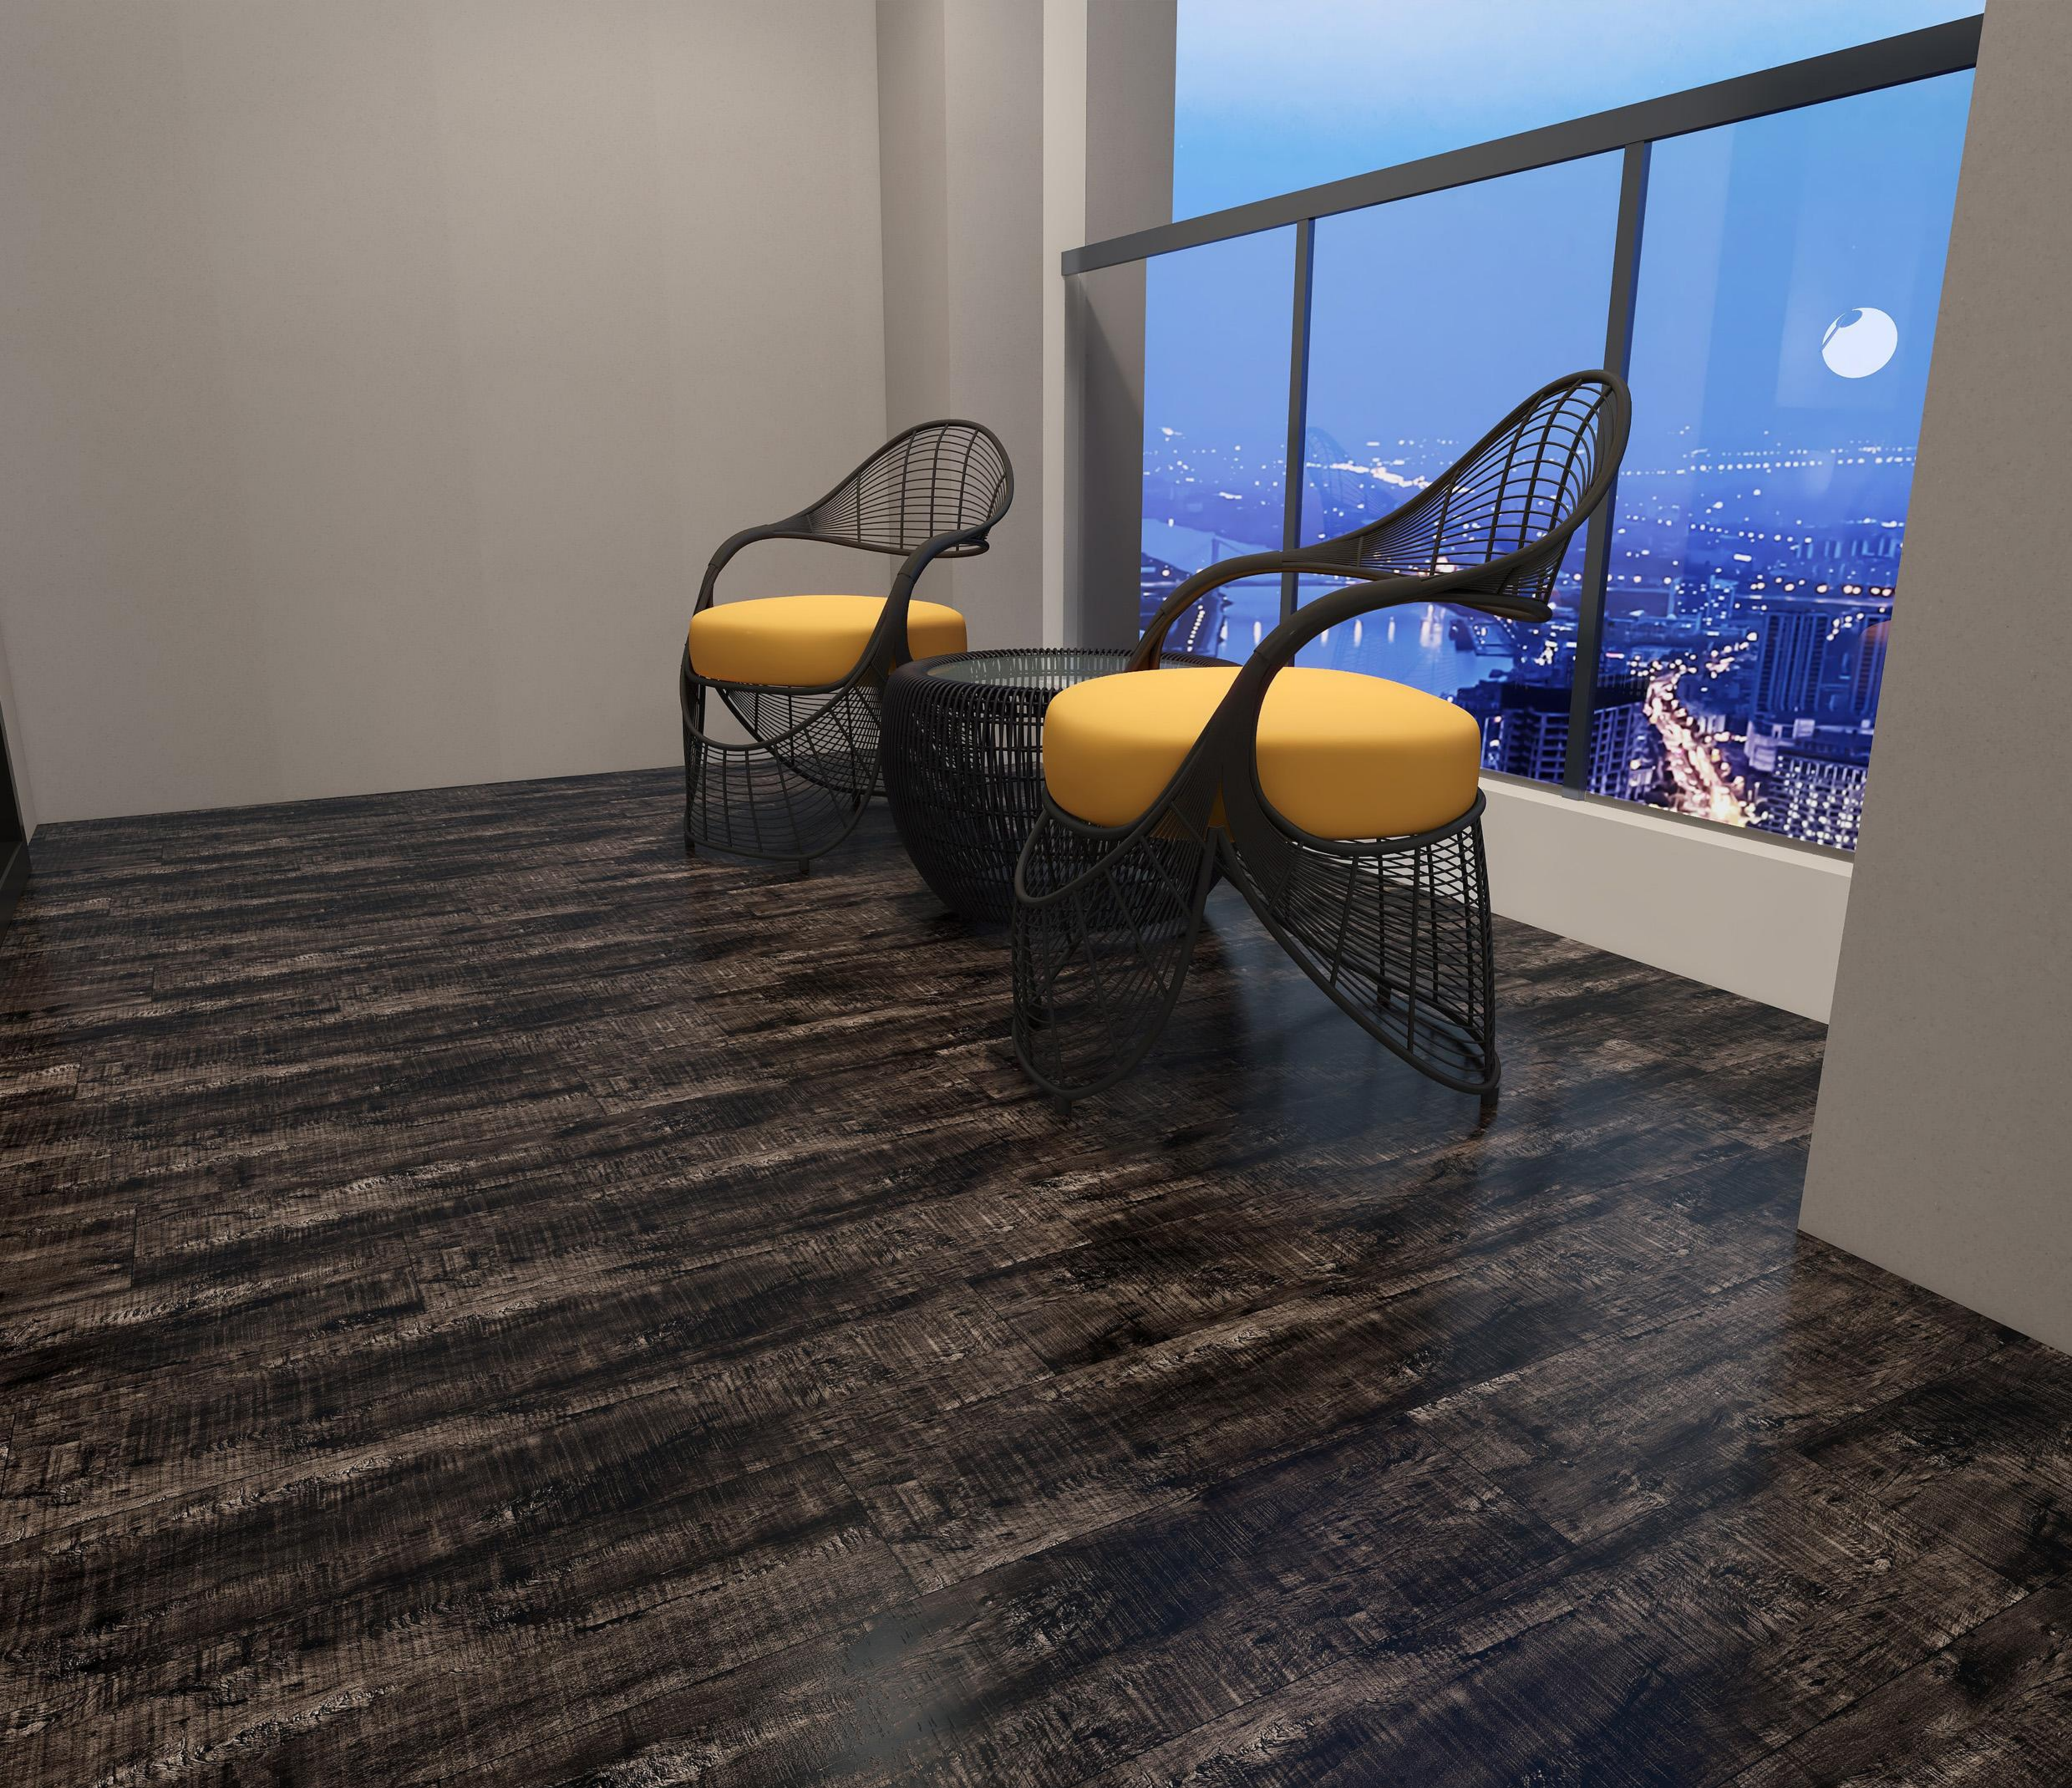

Colour Code 120005

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120006

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize


perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120007

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm

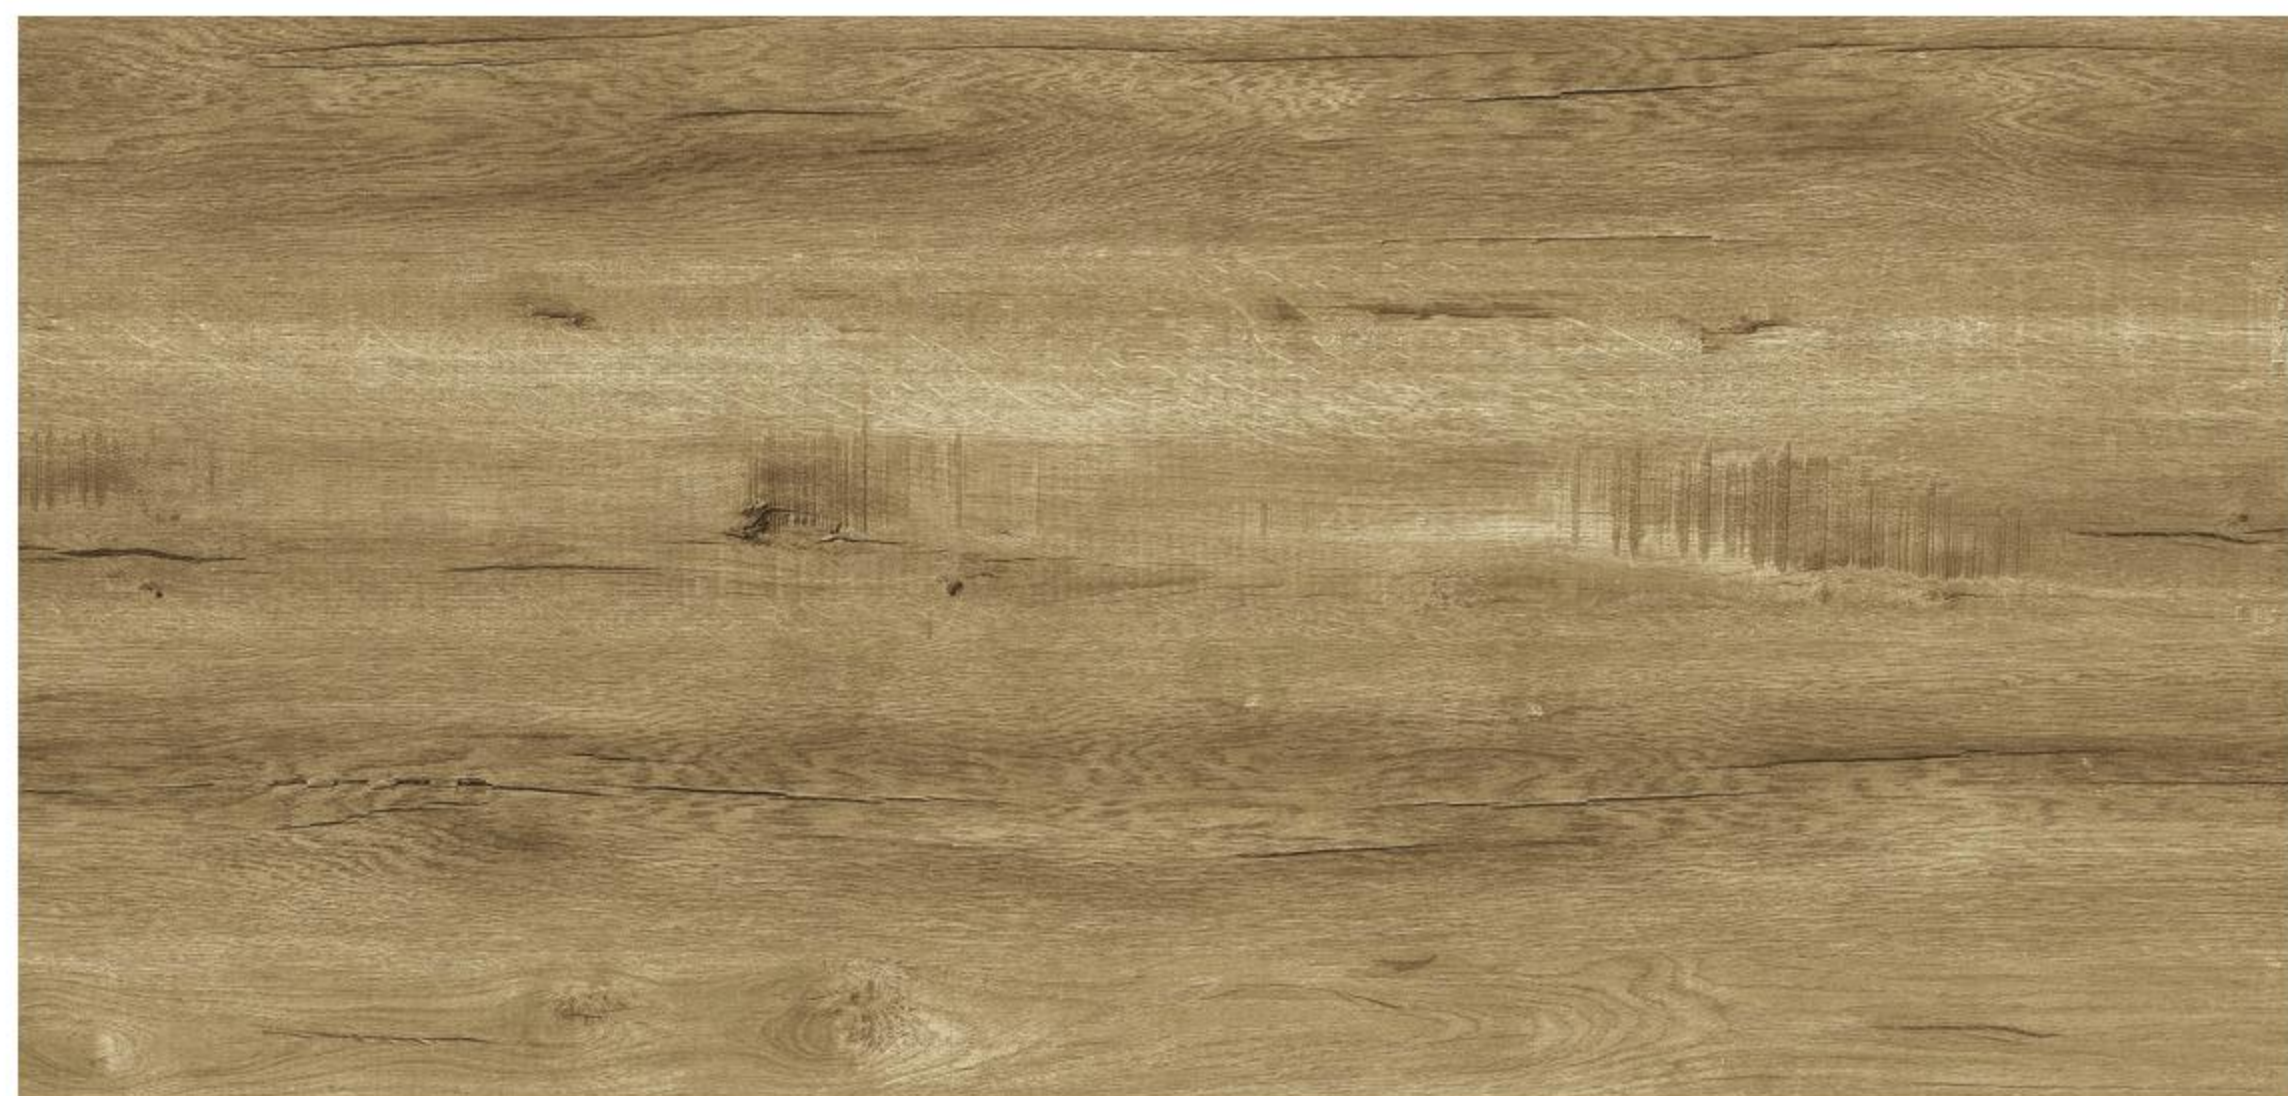

Quiet



Waterproof



Texture



Stabilize


perfek flooring™

Artisan Classic | 2.0mm LVT



Colour Code **120008**

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm

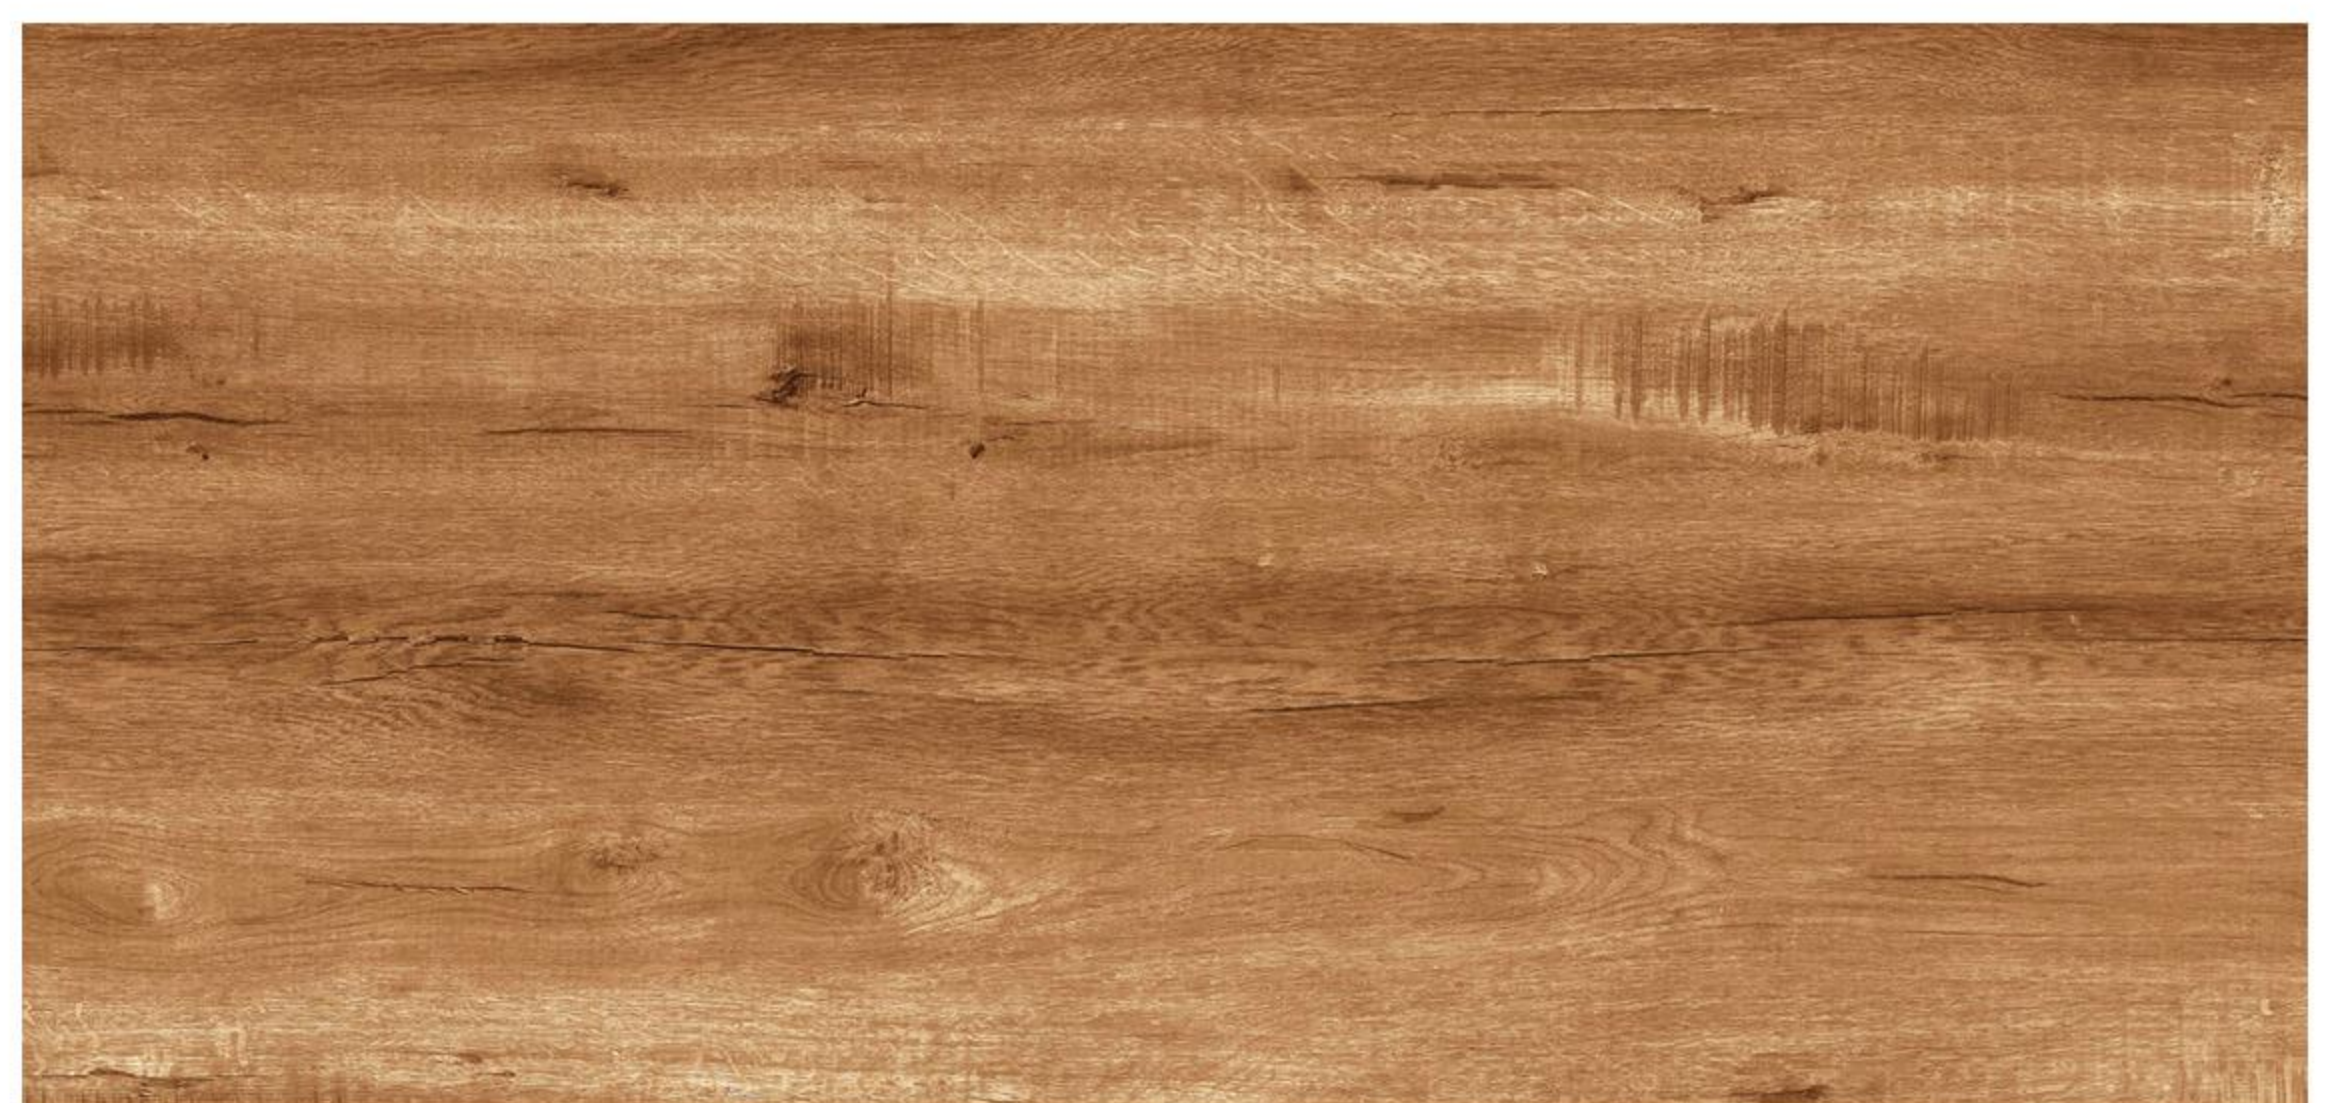

Quiet



Waterproof



Texture



Stabilize

perfekt flooring™

Artisan Classic | 2.0mm LVT



Colour Code 120009

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120010

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT



Colour Code 120011

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Classic | 2.0mm LVT



Colour Code 120012

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2mm/0.2mm (wear layer)
Packing: 18pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Classic | 2.0mm LVT

TECHNICAL SPECIFICATION

TEST METHOD		PERFEKTFLOORING
Material Composition		LVT
 Average total thickness	ISO24346	2.0mm±0.13mm
Layers and thickness		
UV Coating Layer Material	GB2828-87 II	uv coating
UV Coating Thickness & Tolerance		10µm(12-15g/m²)
Wear Layer Material		transparent pvc layer
Wear Layer Thicknesss	ISO24346	0.2mm
PVC decor film thickness	ISO24346	0.07mm
Plank Size	ISO24341	228.6*1219.2mm
 Width	ISO24341	228.6±0.15mm
 Length	ISO24341	1219.2±0.5mm
SQM/Carton		5.01676SQM
Layers and thickness		
 Dimensional Stability	ISO23999	≤0.12%
Curling/Curving	ISO23999	≤1.2mm
 Dimensional stability and curling after exposure to heat	ISO23999	≤0.12%
 Weight	EN430	4kg/m2±0.5kgs
Peel Strength	ISO24345	≥75N/5cm
Straightness	ISO24342	≤0.2mm
 Abrasion resistance	EN660:part-1	Group T
 Residual indentation	ISO24343-1	≤0.1mm
 Color fastness	ISO 105-B02:1994	≥Grade 6
 Castor chair	EN425	Typ W
 Water resistance	EN317	0% Swelling
 Slip resistance	AS4586 /DIN 51130	R10
Formaldehyde Emission	EN717-1	E1
Assembled gap	Industry Standard	≤0.15mm
Height difference (Assembled)	Industry Standard	≤0.20mm
Phtalate	CPSC-CH-C1001-09.3	ND
Acoustic Performance	EN ISO 717-2	△Lw=10 dB
 Chemical Resistance	EN438	Grade 5
 Flexibility	ISO24344	



Website:-www.perfektflooring.com
Email:-info@perfektflooring.com