



ARTISAN LITE

LVT FLOORING(1.5MM)

Natural Texture

| Waterproof

| Ultra Stabilize

LVT FLOORING

Six advantages

1. GREEN ENVIRONMENTAL PROTECTION

The main raw material for the production of PVC flooring is polyvinyl chloride, polyvinyl chloride is environmentally friendly and non-toxic renewable resources, it has been widely used in People's Daily life, such as tableware, medical infusion pipe bags, etc., its environmental protection is no need to worry.



2. SUPER WEAR-RESISTANT

The surface of the LVT floor has a special layer of PVC wear-resistant layer, which can be used for 5-10 years under normal circumstances according to the different thickness of the wear-resistant layer, and the thickness and quality of the wear-resistant layer directly determine the use time of the PVC floor. LVT flooring has superior wear resistance, so in hospitals, schools, office buildings, shopping malls, supermarkets, transportation and other places with large traffic, PVC flooring is becoming more and more popular.

(For the wear resistance of the wear layer, it is mainly used as an indicator by measuring loss, that is, mass reduction)



3. HIGH ELASTICITY SUPER IMPACT RESISTANCE

PVC floor texture is soft, so the elasticity is very good, under the impact of heavy objects has a good elastic recovery, while PVC floor has a strong impact resistance, for heavy impact damage has a strong elastic recovery, will not cause damage. Excellent PVC floor can minimize the damage to the human body, and can disperse the impact on the foot, in the space with a large flow of people paved with excellent PVC floor, its personnel fall



4. FIRE PREVENTION FLAME RETARDANT

Qualified PVC floor fire indicators can reach B1 level, B1 level means that the fire performance is very good, second only to stone. Out of fire.




5. EASY MAINTENANCE

The maintenance of PVC floor is very convenient, and the ground can be wiped with a mop. If you want to maintain the lasting bright effect of the floor, only regular waxing maintenance can be done, and the number of maintenance is far lower than that of laminate flooring



LVT FLOORING Technical data sheet

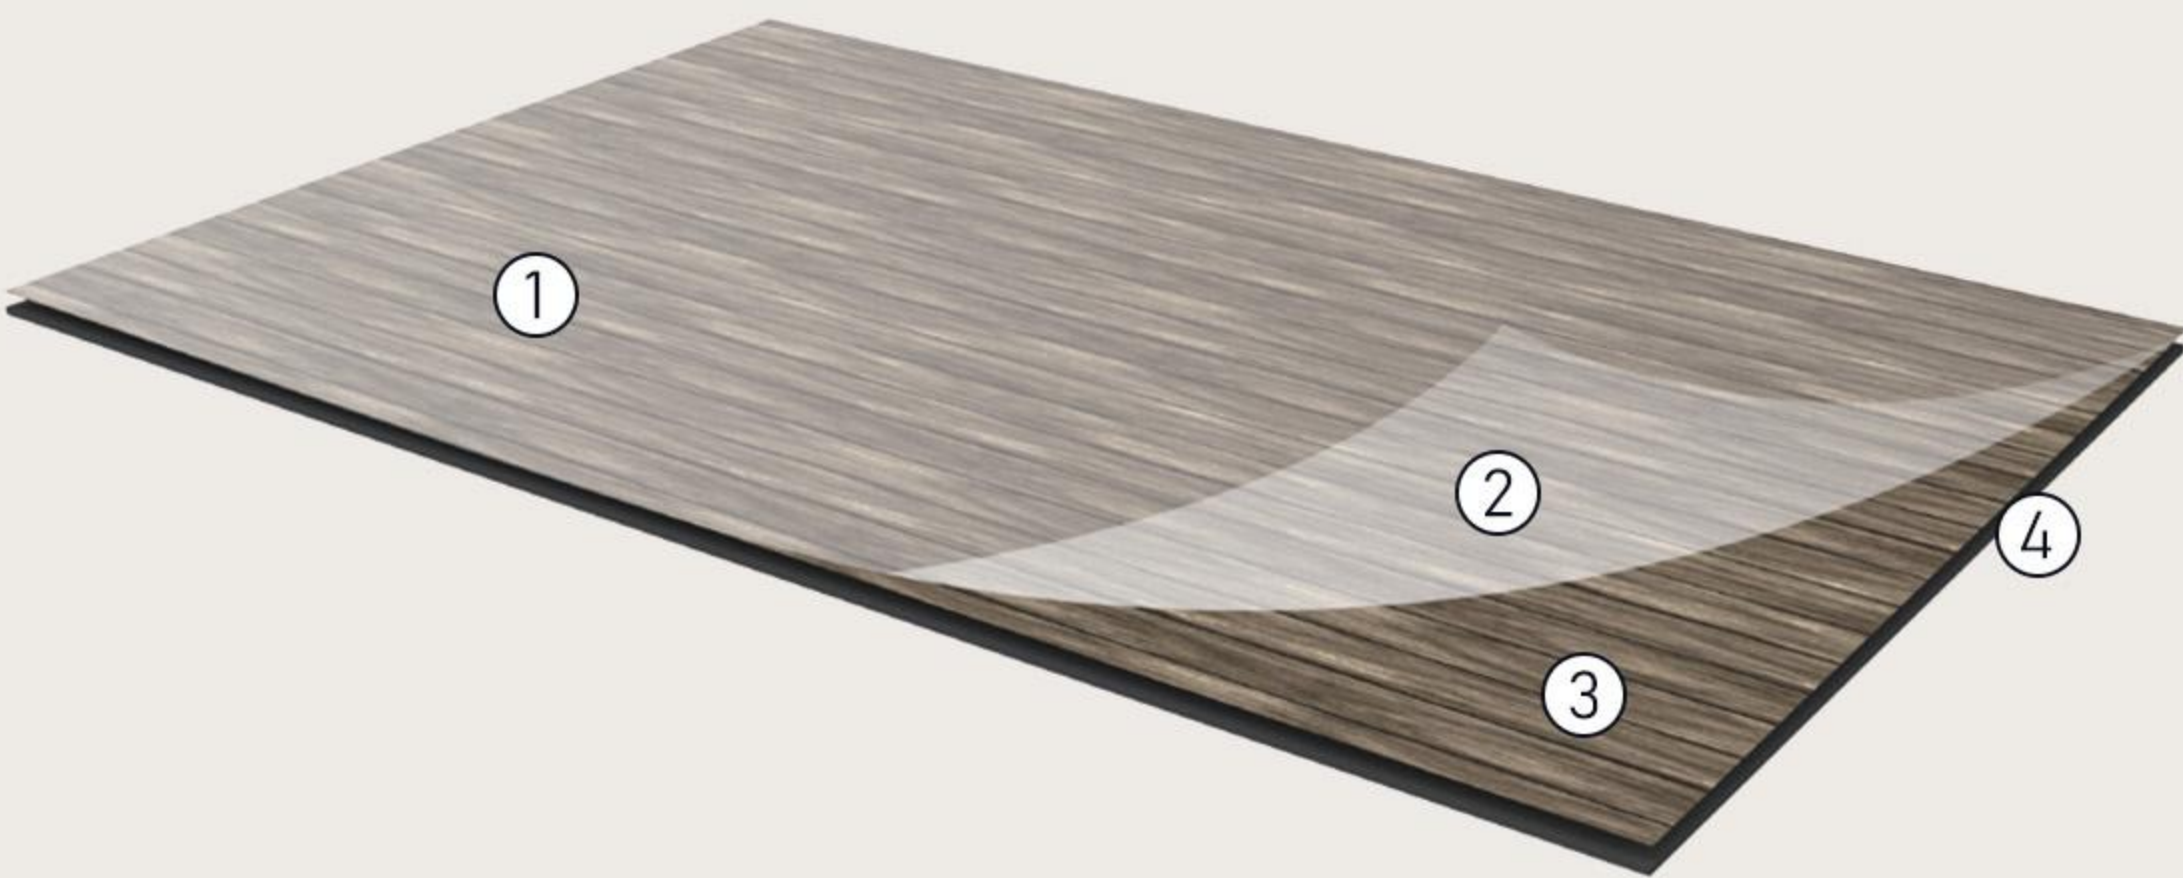


- | | |
|---|---------------------------|
| ① | UV Coating |
| ② | Wearlayer |
| ③ | Decor film layer |
| ④ | LVT middle & bottom layer |



6. WATERPROOF MOISTURE-PROOF

PVC floor because the main component is vinyl resin, and water has no affinity, so it is naturally not afraid of water, as long as it is not soaked for a long time will not be damaged; And will not cause mildew due to high humidity.

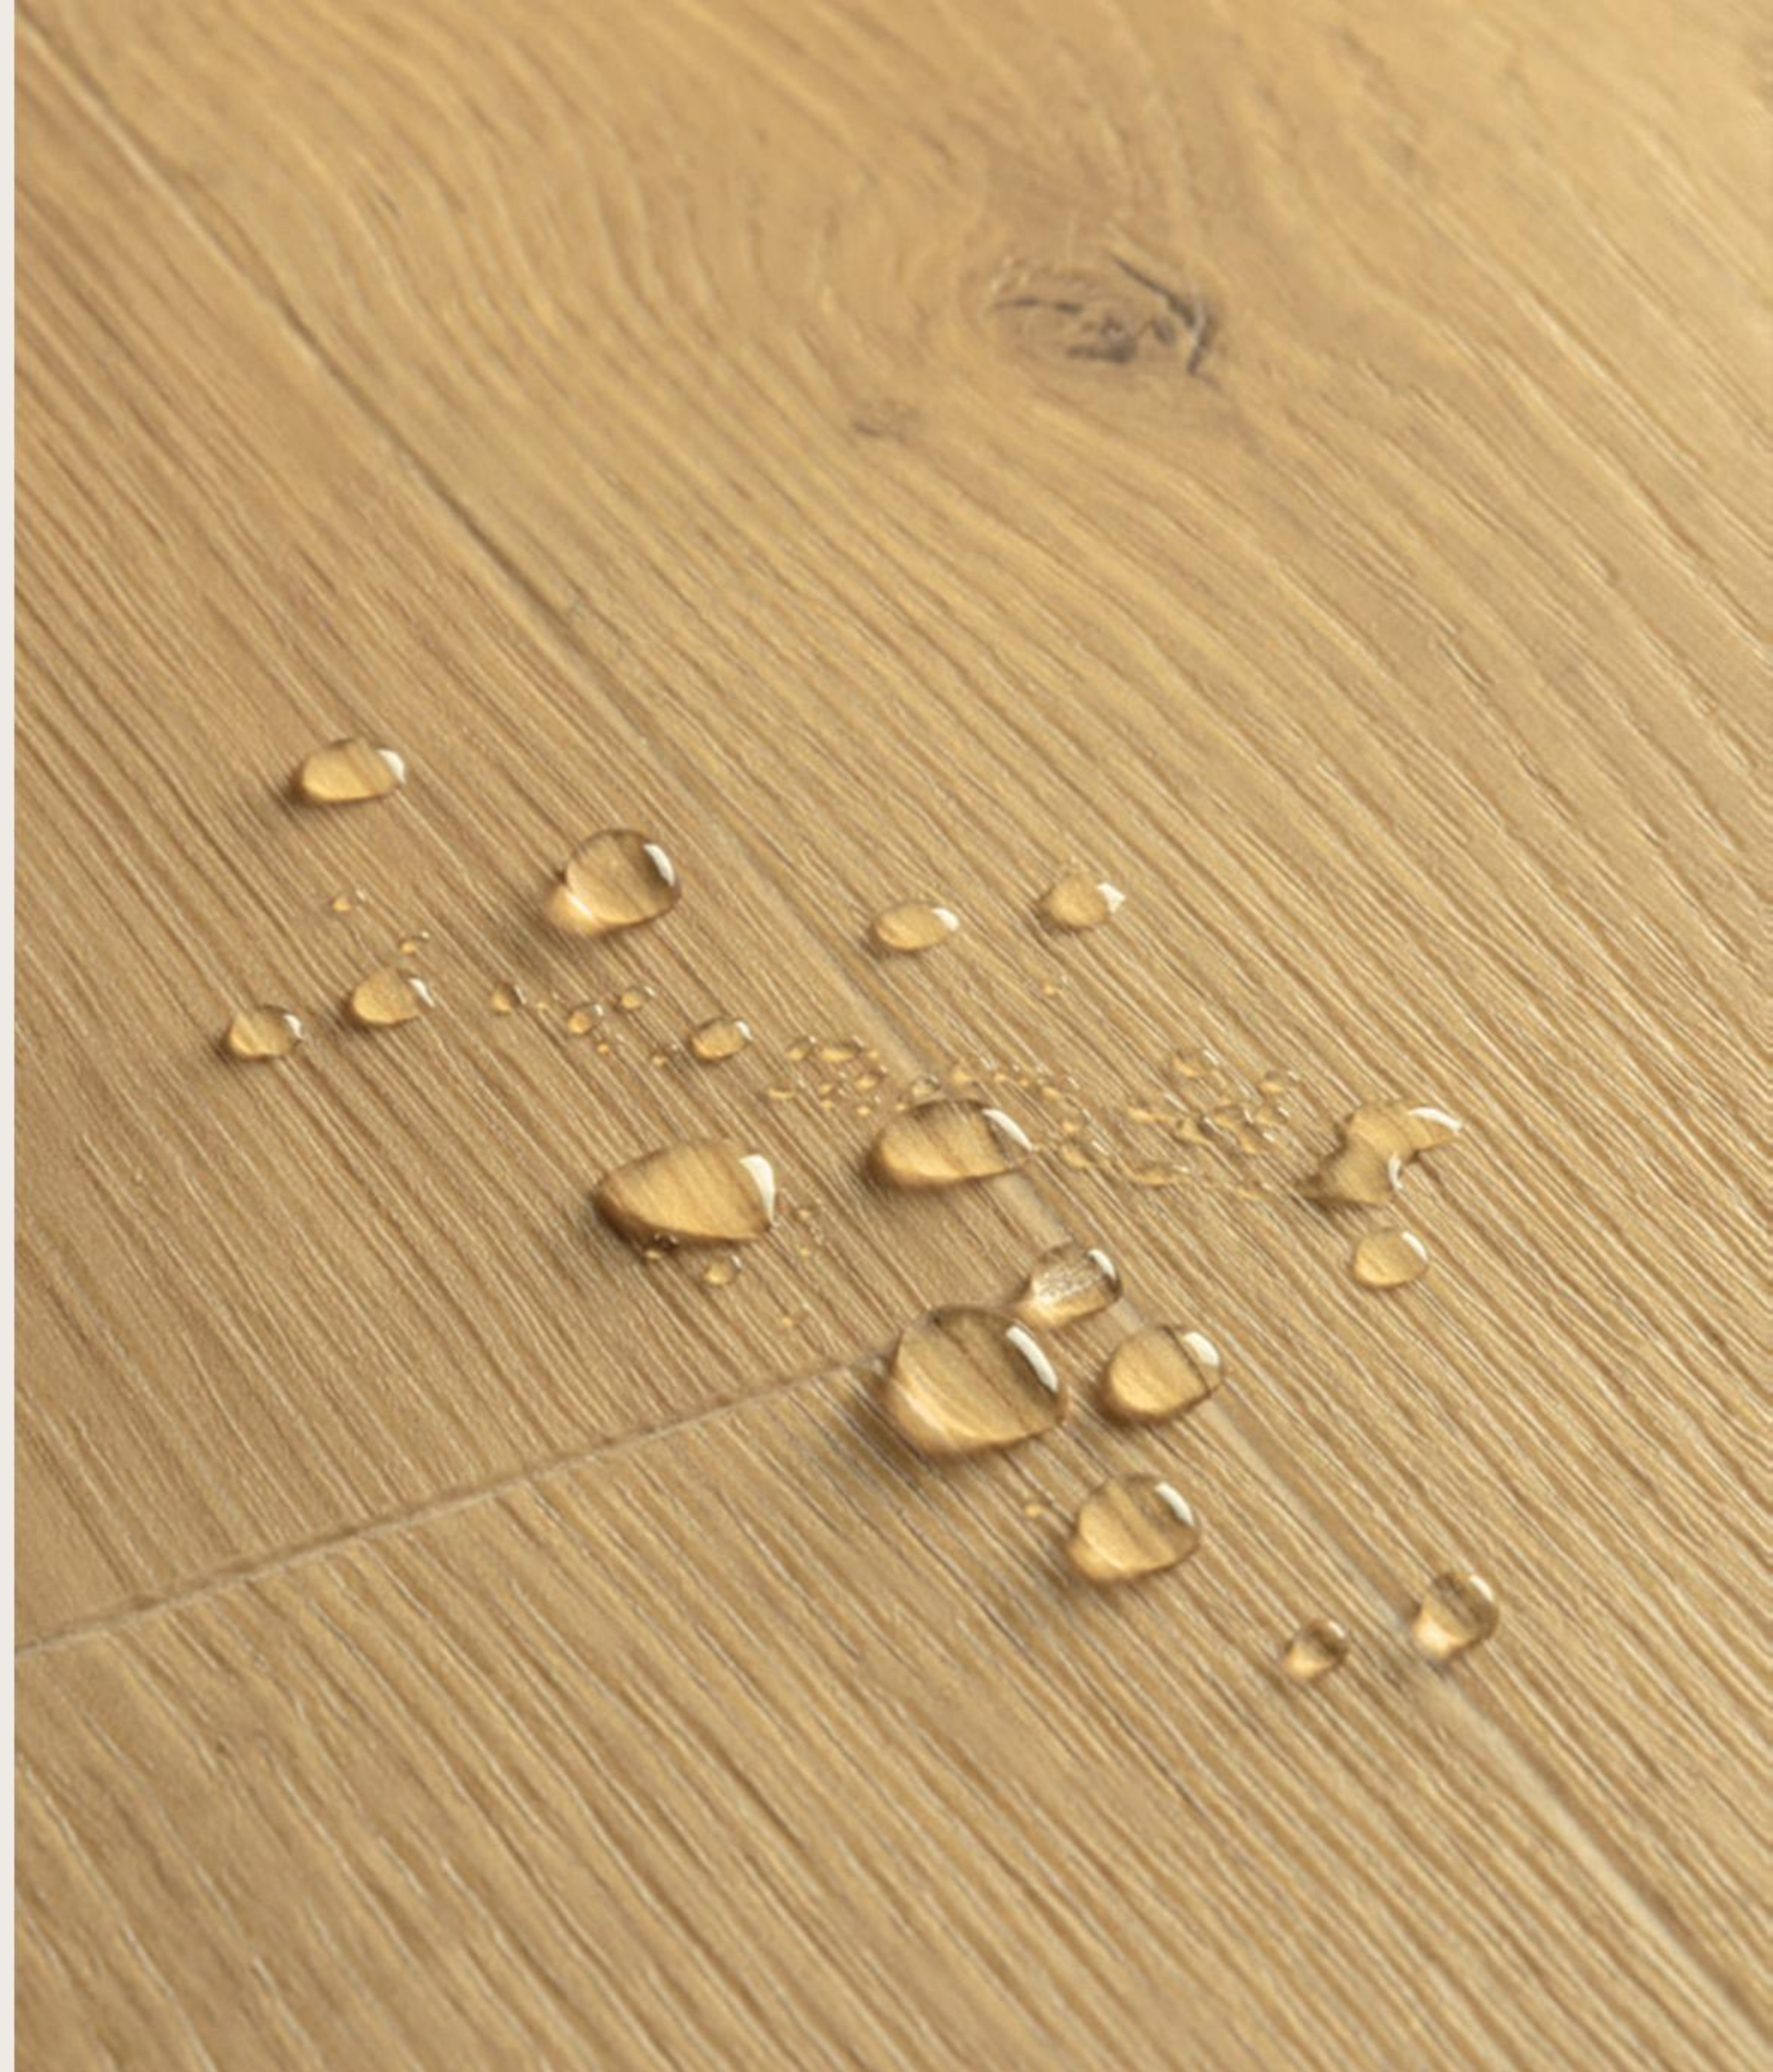

COLOR x PAVING



Color : 180001



Color : 180002



Color : 180003



Color : 180004



Color : 180005



Color : 180006



Color : 180007



Color : 180008




Color : 180009



Colour Code 180001

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm

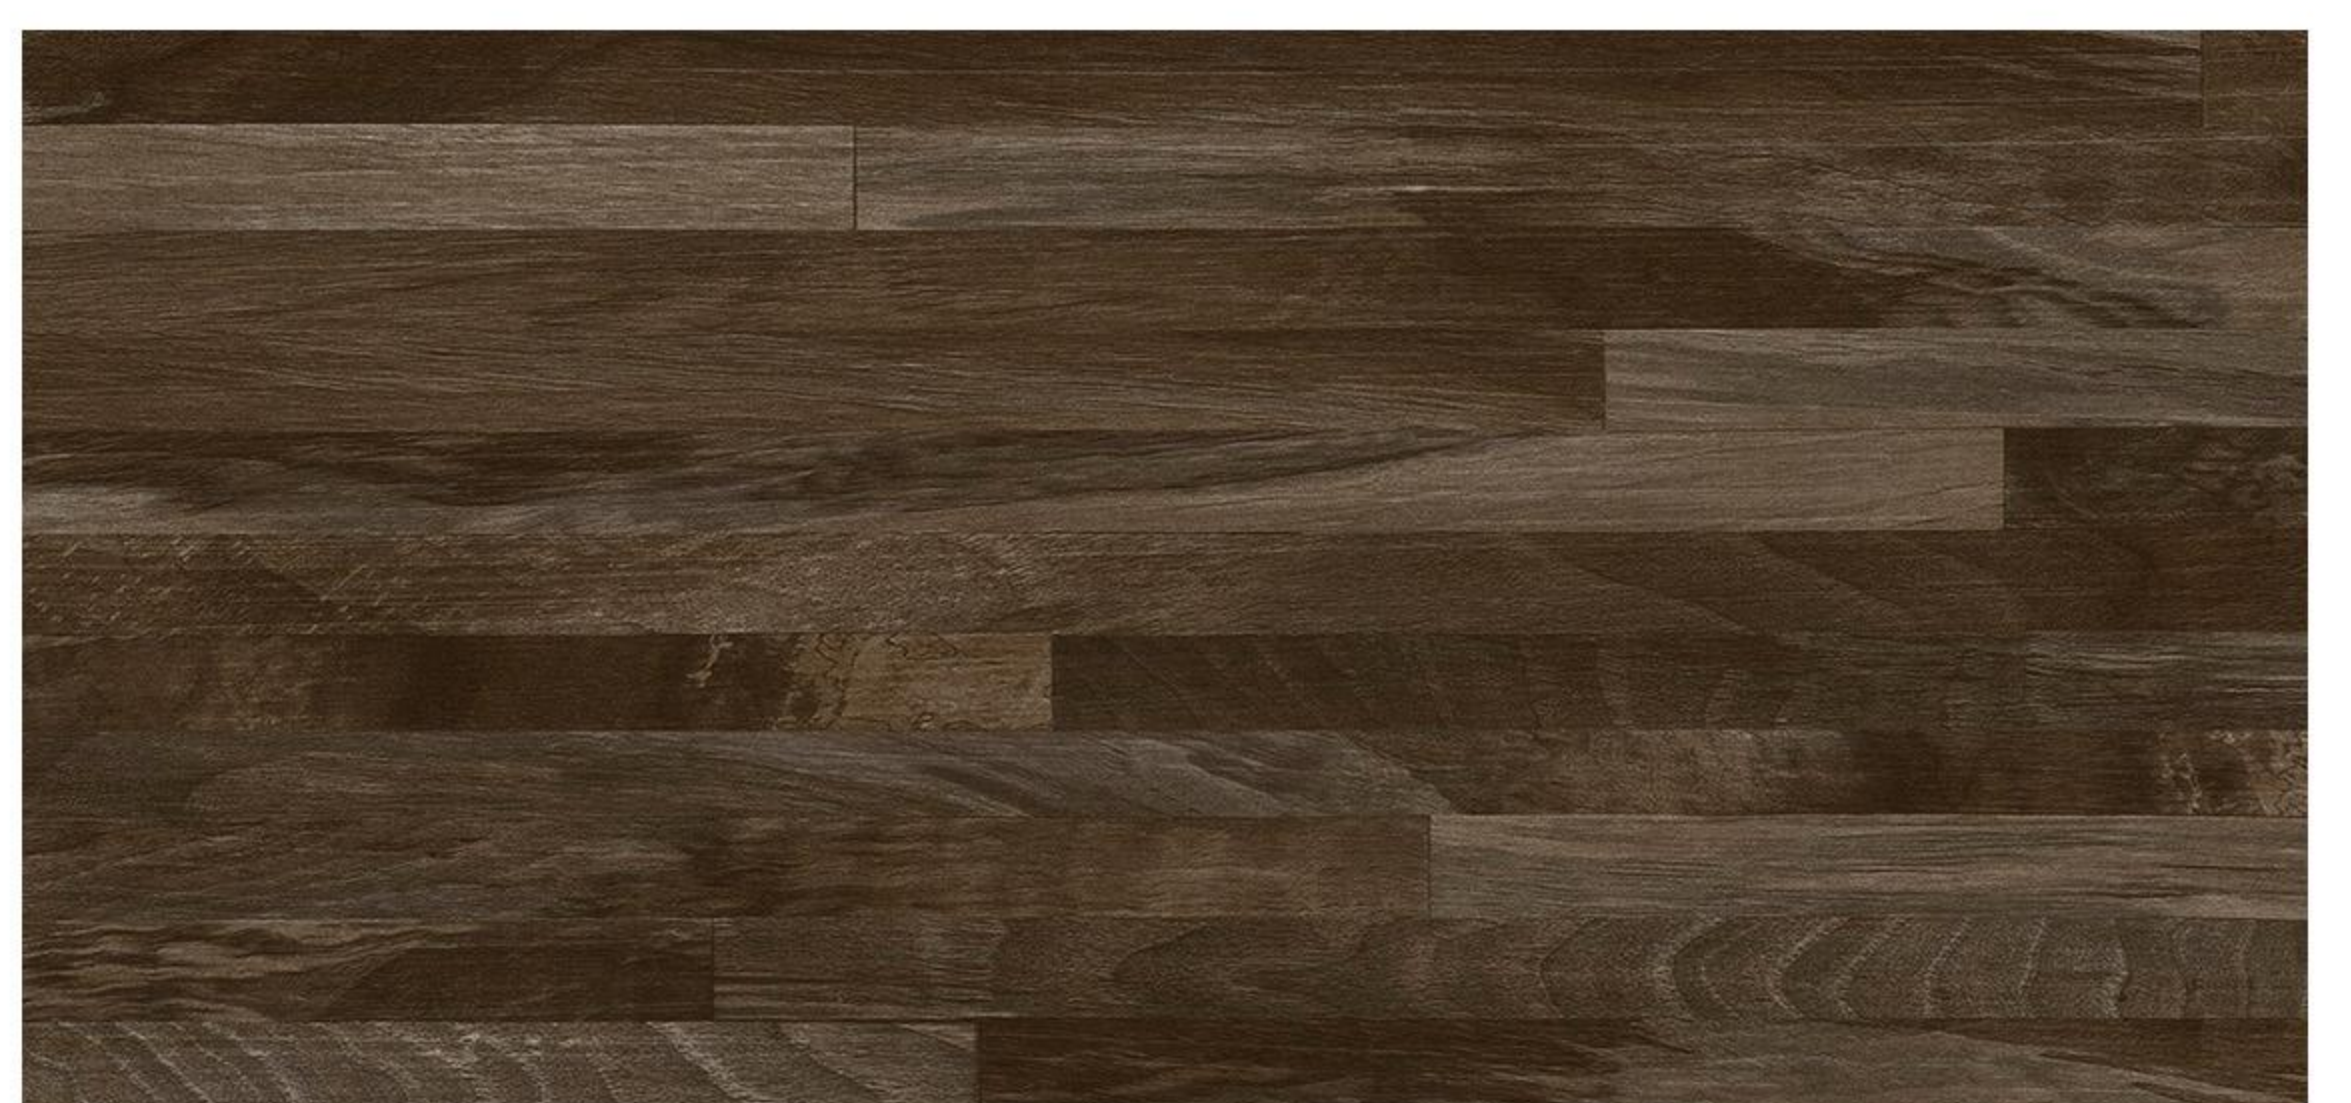

Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



Colour Code 180002

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180003

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



Colour Code
180004

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



Colour Code 180005

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



Colour Code

180006

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code **180007**

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfektflooring™

Artisan Lite | 1.5mm LVT



Colour Code 180008

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180009

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



COLOR x PAVING



Color : 180010



Color : 180011



Color : 180012



Color : 180013



Color : 180014



Color : 180015



Color : 180016



Color : 180017



Color : 180018



Colour Code 180010

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180011

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180012

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180013

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfektflooring™

Artisan Lite | 1.5mm LVT



Colour Code 180014

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180015

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Lite | 1.5mm LVT



Colour Code **180016**

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code **180017**

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Lite | 1.5mm LVT



Colour Code 180018

Plank Size: 6"x36"/152.4*914.4mm
Thickness: 1.5mm/0.1mm (wear layer)
Packing: 36pcs per Box/5.01676 sqm



Quiet



Waterproof



Texture



Stabilize

perfektflooring™

Artisan Lite | 1.5mm LVT

TECHNICAL SPECIFICATION

TEST METHOD		PERFEKTFLOORING
Material Composition		LVT
 Average total thickness	ISO24346	1.5mm±0.13mm
Layers and thickness		
UV Coating Layer Material		uv coating
UV Coating Thickness & Tolerance		10µm(12-15g/m²)
Wear Layer Material		transparent pvc layer
Wear Layer Thicknesss		0.1mm
PVC decor film thickness		0.07mm
Plank Size		152.4*914.4mm
 Width	ISO24341	152.4±0.15mm
 Length	ISO24341	914.4±0.5mm
SQM/Carton		5.01676SQM
Layers and thickness		
 Dimensional Stability	ISO23999	≤0.12%
Curling/Curving		≤1.2mm
 Dimensional stability and curling after exposure to heat	ISO23999	≤0.12%
 Weight	EN430	3kg/m2±0.5kgs
Peel Strength		≥75N/5cm
Straightness		≤0.2mm
 Abrasion resistance	EN660:part-1	Group T
 Residual indentation	ISO24343-1	≤0.1mm
 Color fastness	ISO 105-B02:1994	≥Grade 6
 Castor chair	EN425	Typ W
 Water resistance	EN317	0% Swelling
 Slip resistance	AS4586 /DIN 51130	R10
Formaldehyde Emission		E1
Assembled gap		≤0.15mm
Height difference (Assembled)		≤0.20mm
Phtalate		ND
Acoustic Performance		△Lw=10 dB
 Chemical Resistance	EN438	Grade 5
 Flexibility	ISO24344	20mm



Website:-www.perfektflooring.com
Email:-info@perfektflooring.com

