



LVT Flooring(2.3mm)

Artisan Premium



WATERPROOF MOISTURE-PROOF EFFECTIVE PROTECTION

Natural beauty
Exceptional performance

HIGH ELASTICITY SUPER IMPACT RESISTANCE

PVC floor texture is soft, so the elasticity is very good, under the impact of heavy objects has a good elastic recovery, while PVC floor has a strong impact resistance, for heavy impact damage has a strong elastic recovery, will not cause damage. Excellent PVC floor can minimize the damage to the human body, and can disperse the impact on the foot, in the space with a large flow of people paved with excellent PVC floor, its personnel fall



FIRE PREVENTION FLAME RETARDANT

Qualified PVC floor fire indicators can reach B1 level, B1 level means that the fire performance is very good, second only to stone. Out of fire.





Colour Code 2101

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm



Quiet



Waterproof



Texture



Stabilize

perfek flooring™

Artisan Premium | 2.3mm LVT



Colour Code 2102

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Premium | 2.3mm LVT



Colour Code 2103

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm



Quiet



Waterproof



Texture



Stabilize


perfekt**flooring**™

Artisan Premium | 2.3mm LVT



Colour Code 2104

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm

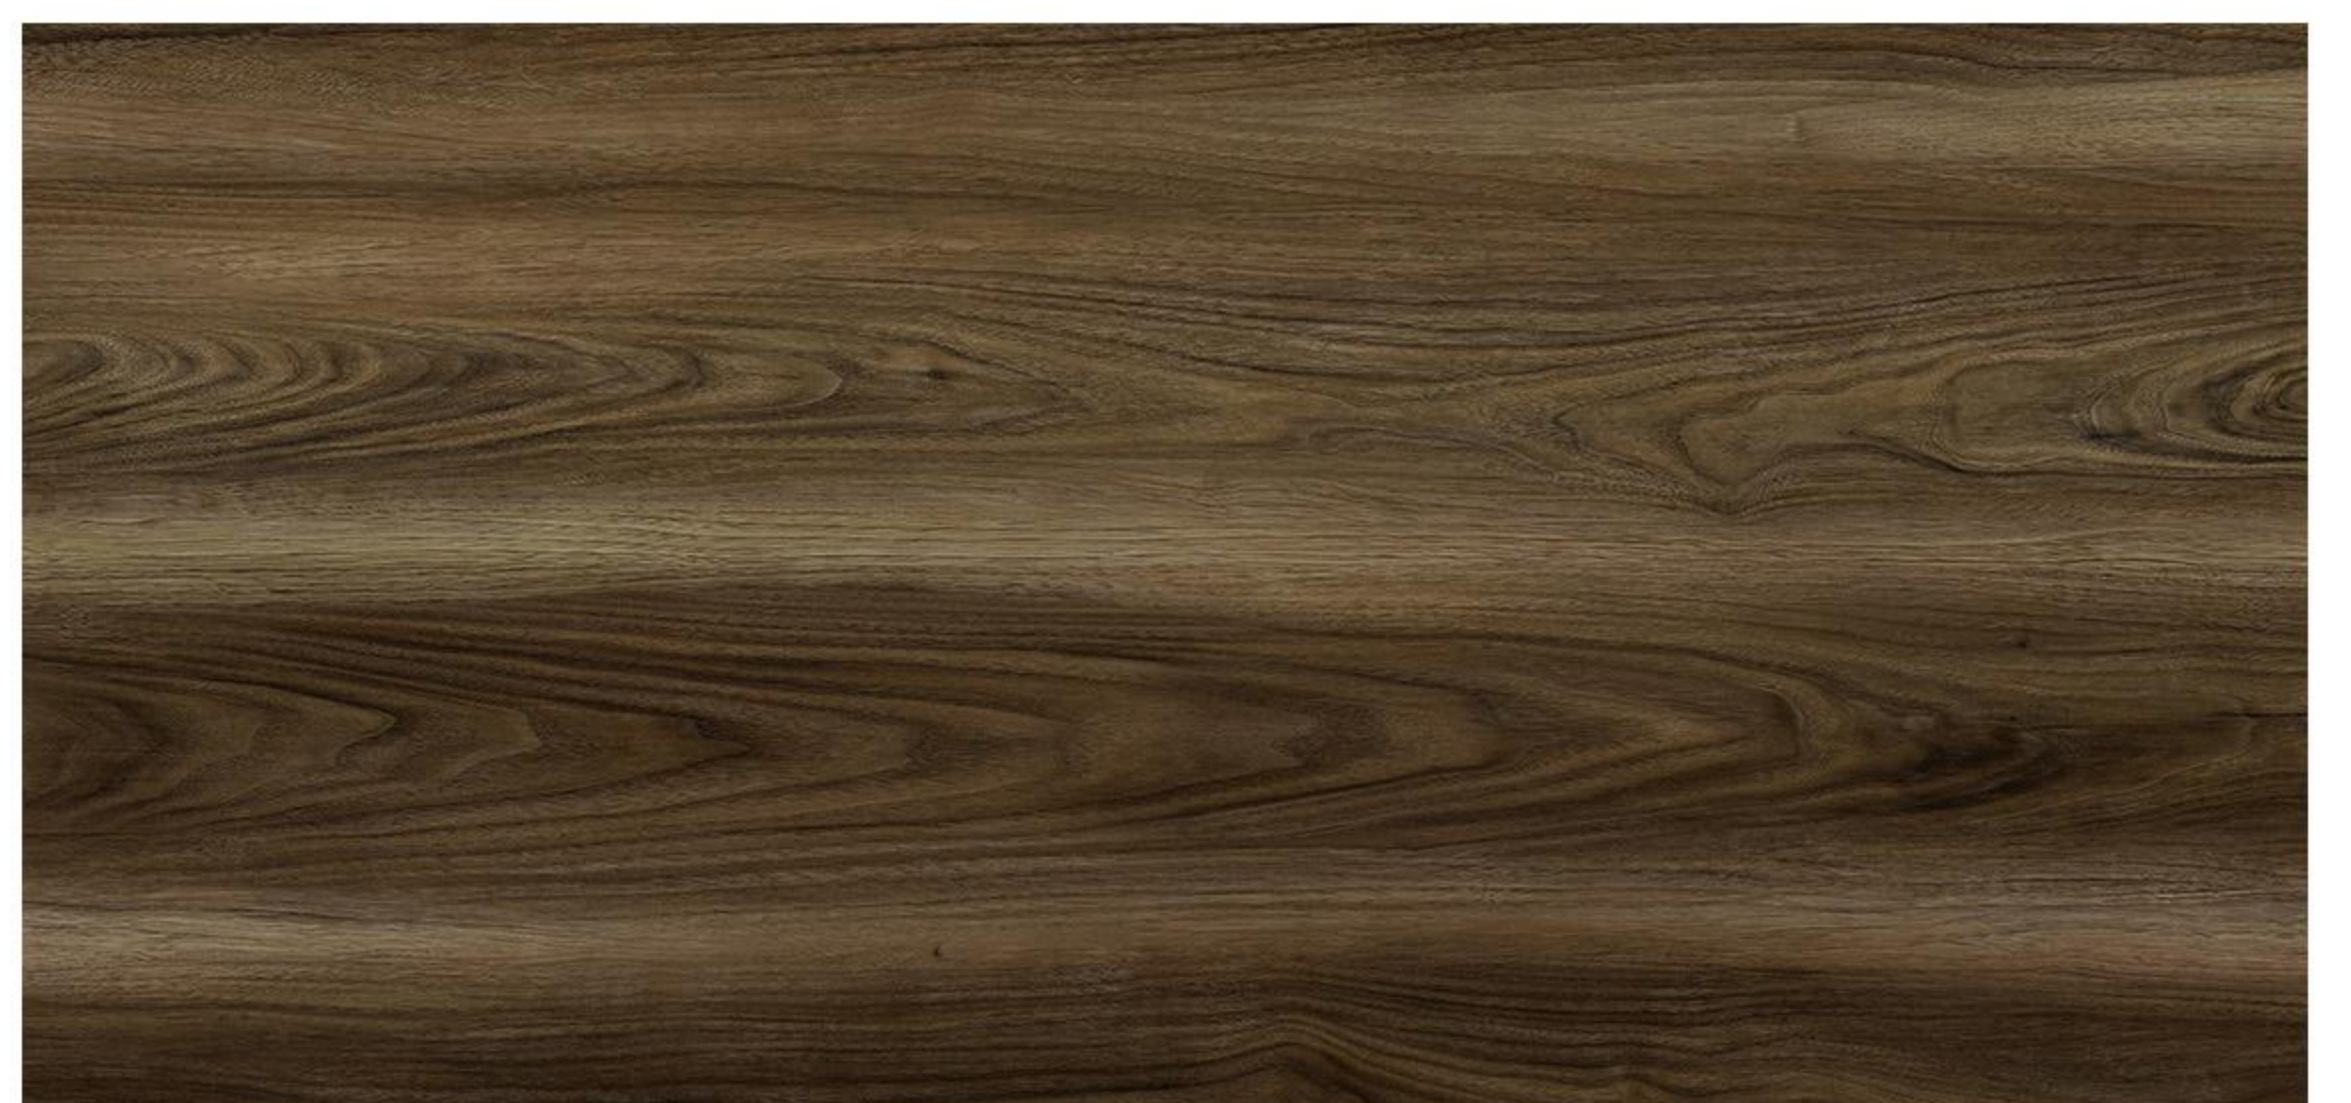

Quiet



Waterproof



Texture



Stabilize

perfekt**flooring**™

Artisan Premium | 2.3mm LVT



Colour Code 2105

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm



Quiet



Waterproof



Texture



Stabilize


perfekt flooring™

Artisan Premium | 2.3mm LVT



Colour Code 2106

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm

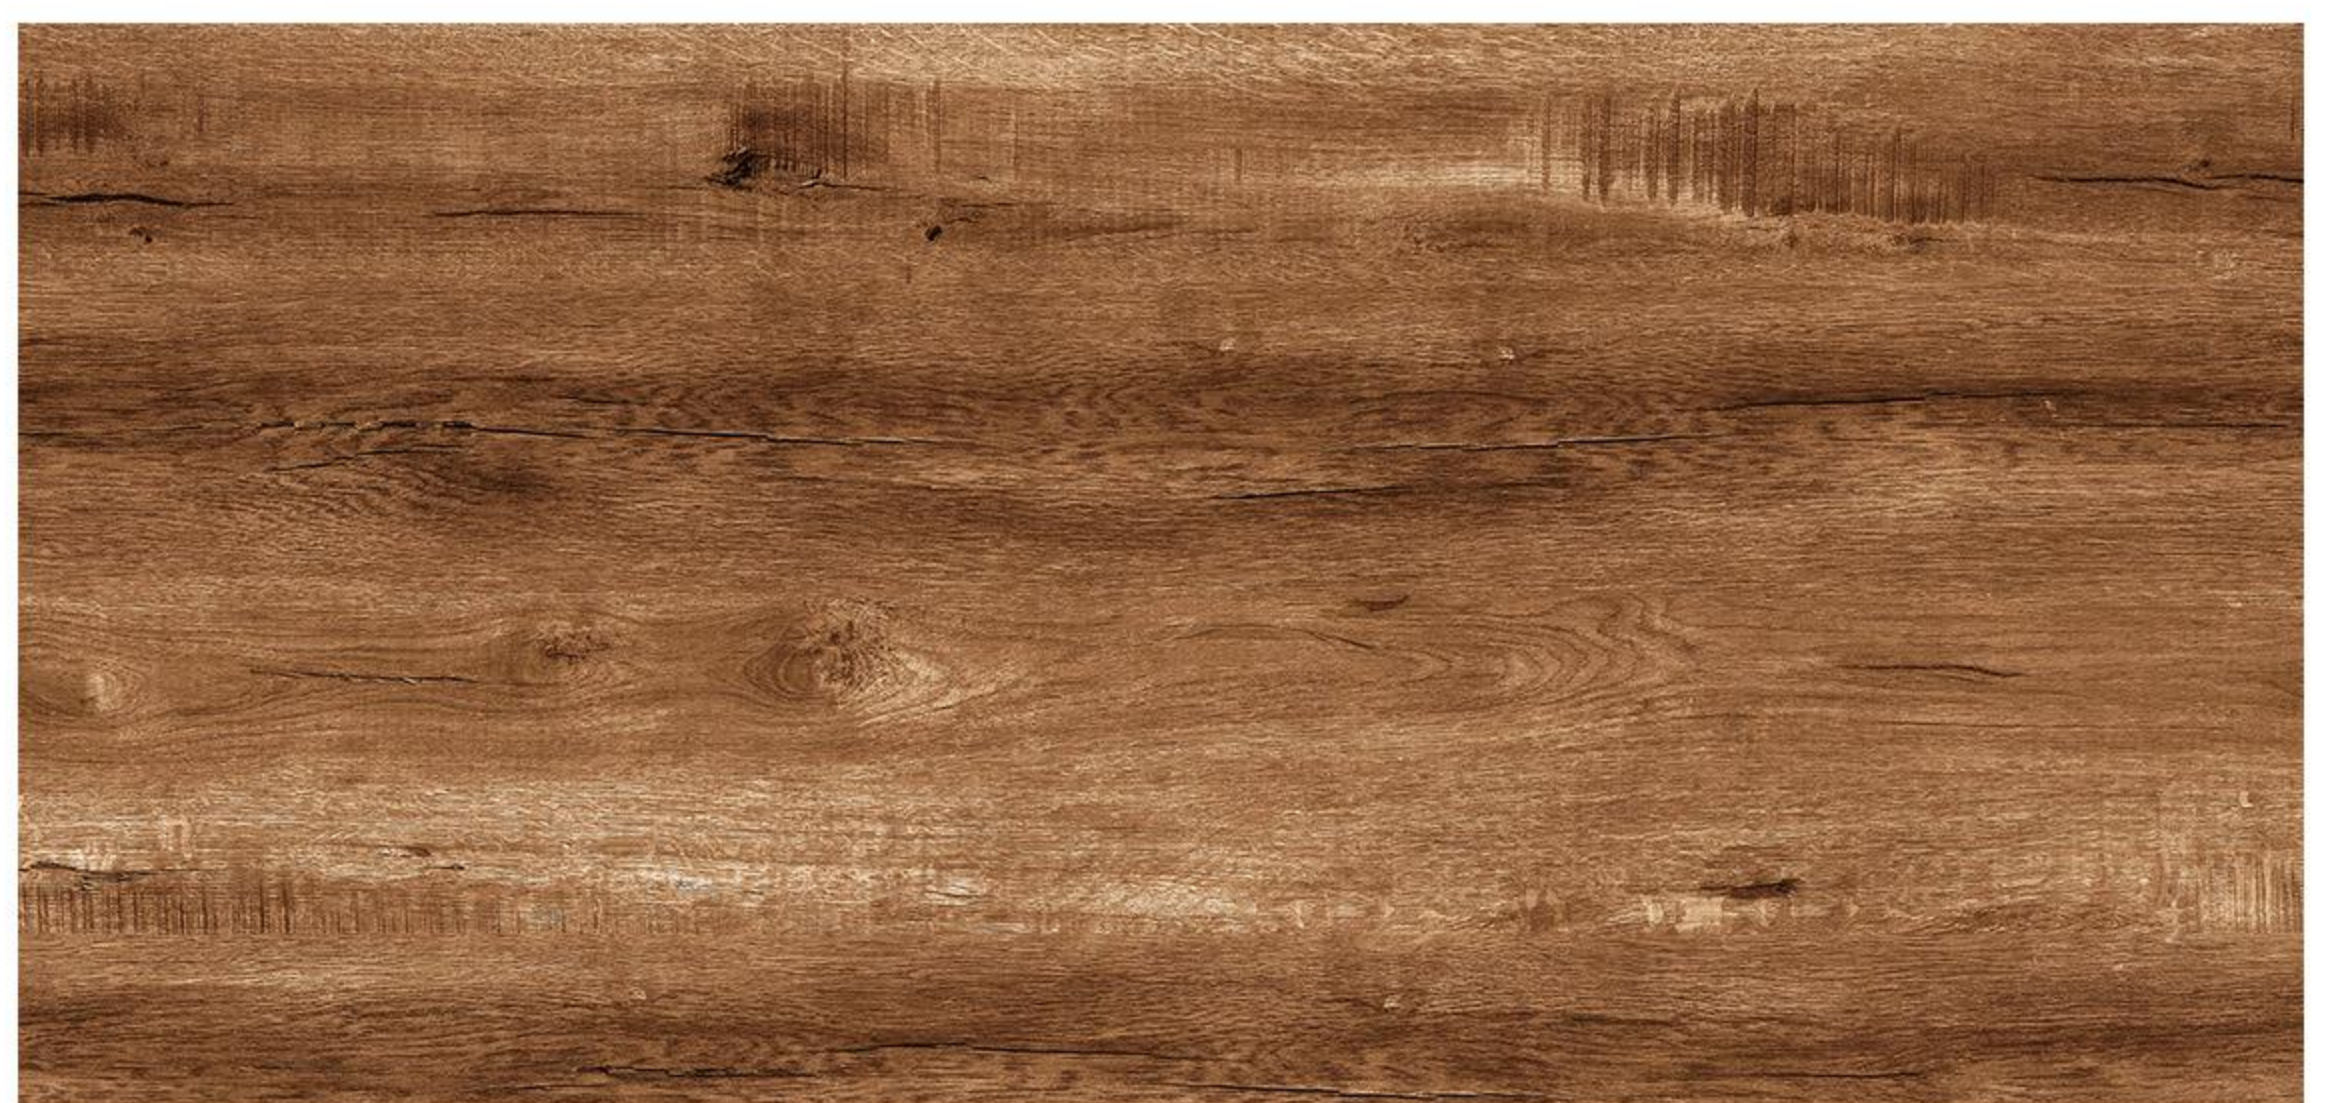

Quiet



Waterproof



Texture



Stabilize


perfekt flooring™

Artisan Premium | 2.3mm LVT



Colour Code 2107

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm

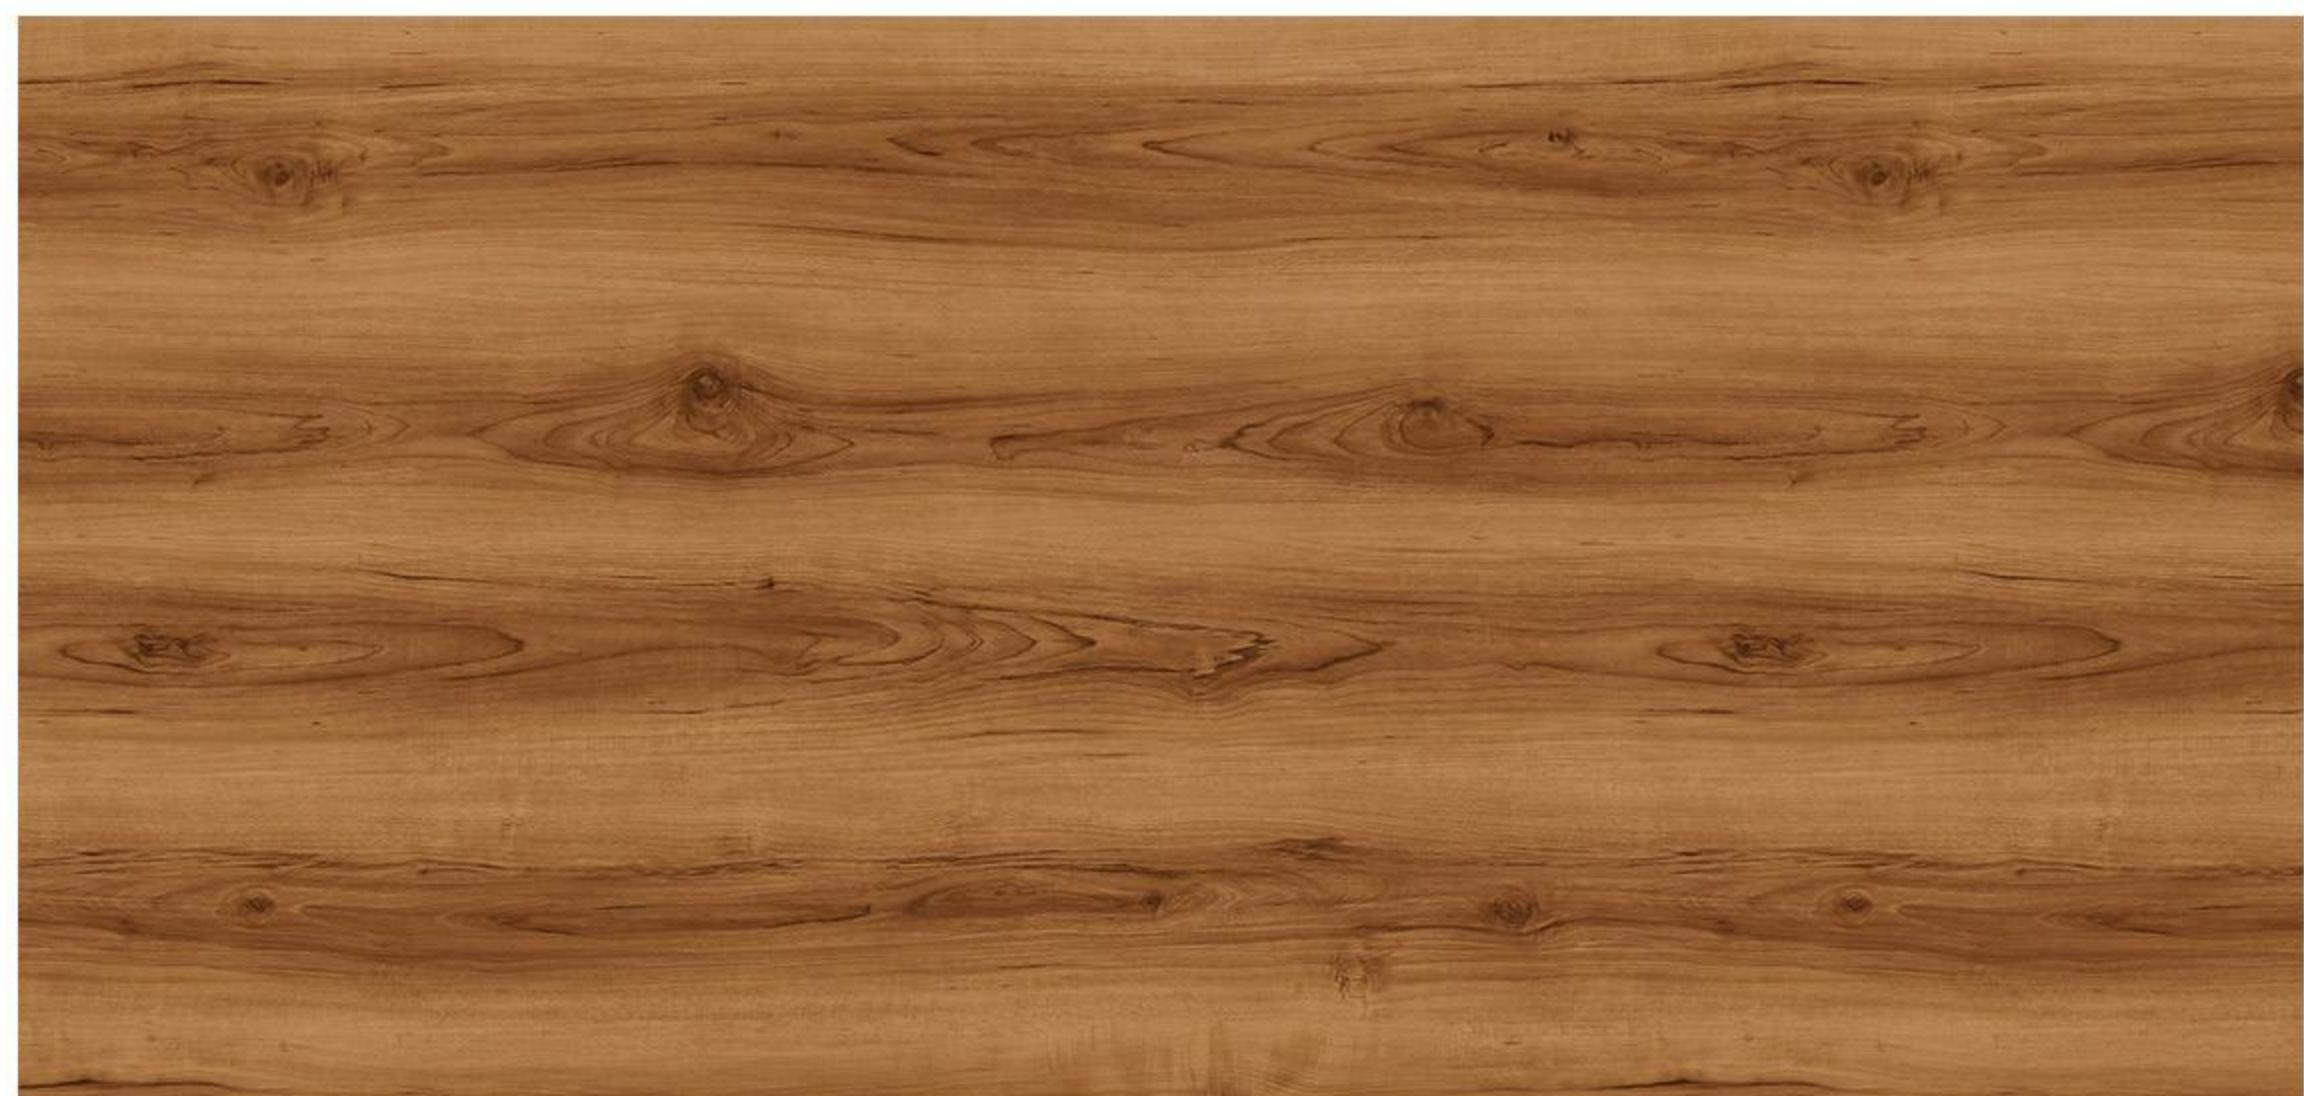

Quiet



Waterproof



Texture



Stabilize

perfekt flooring™

Artisan Premium | 2.3mm LVT



Colour Code 2108

Plank Size: 9"x48"/228.6*1219.2mm
Thickness: 2.3mm/0.3mm (wear layer)
Packing: 15pcs per Box/4.1806 sqm



Quiet



Waterproof



Texture



Stabilize

perfekt flooring™

Artisan Premium | 2.3mm LVT

TECHNICAL SPECIFICATION

TEST METHOD		PERFEKTFLOORING
Material Composition		LVT
 Average total thickness	ISO24346	2.3mm±0.13mm
Layers and thickness		
UV Coating Layer Material		uv coating
UV Coating Thickness & Tolerance		10µm(12-15g/m²)
Wear Layer Material		transparent pvc layer
Wear Layer Thicknesss		0.3mm
PVC decor film thickness		0.07mm
Plank Size		228.6*1219.2mm
 Width	ISO24341	228.6±0.15mm
 Length	ISO24341	1219.2±0.5mm
SQM/Carton		4.1806SQM
Layers and thickness		
 Dimensional Stability	ISO23999	≤0.12%
Curling/Curving		≤1.2mm
 Dimensional stability and curling after exposure to heat	ISO23999	≤0.12%
 Weight	EN430	4.6kg/m2±0.5kgs
Peel Strength		≥75N/5cm
Straightness		≤0.2mm
 Abrasion resistance	EN660:part-1	Group T
 Residual indentation	ISO24343-1	≤0.1mm
 Color fastness	ISO 105-B02:1994	≥Grade 6
 Castor chair	EN425	Typ W
 Water resistance	EN317	0% Swelling
 Slip resistance	AS4586 /DIN 51130	R10
Formaldehyde Emission		E1
Assembled gap		≤0.15mm
Height difference (Assembled)		≤0.20mm
Phtalate		ND
Acoustic Performance		△Lw=10 dB
 Chemical Resistance	EN438	Grade 5
 Flexibility	ISO24344	20mm



Website:-www.perfektflooring.com
Email:-info@perfektflooring.com

